

STAINLESS STEEL

Key steel

Stainless steel - cold drawn

According to DIN 6880, tolerances h9
Grade according to EN 10088-3
Surface condition: bright

Keilstahl


Edelstahl Rostfrei - kalt gezogen

Abmessungen: Gemäß DIN 6880, Toleranzen h9
Güte nach EN 10088-3
Oberflächenbeschaffenheit: blank

Clavette

Acier inoxydable étirés à froid

Conformes à DIN 6880, tolérances h9,
Nuance selon EN 10088-3
Etat de surface: étirée à blanc

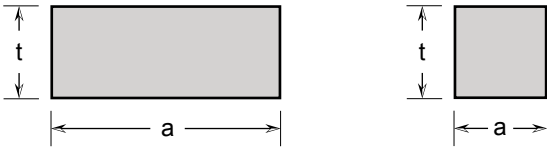

General properties / Generelle Eigenschaften / Valeurs generaux

| Designation Bezeichnung Désignation | G kg/m | Dimensions Abmessungen Dimensions | | |
|---|-----------|---|---------|--|
| | | a mm | t mm | A mm ² x10 ² |
| 3 x 3 | 0.072 | 3 | 3 | 0.09 |
| 4 x 4 | 0.128 | 4 | 4 | 0.16 |
| 5 x 3 | 0.12 | 5 | 3 | 0.15 |
| 5 x 5 | 0.2 | 5 | 5 | 0.25 |
| 6 x 6 | 0.288 | 6 | 6 | 0.36 |
| 8 x 5 | 0.32 | 8 | 5 | 0.4 |
| 8 x 6 | 0.384 | 8 | 6 | 0.48 |
| 8 x 7 | 0.448 | 8 | 7 | 0.56 |
| 10 x 6 | 0.48 | 10 | 6 | 0.6 |
| 10 x 8 | 0.64 | 10 | 8 | 0.8 |
| 12 x 6 | 0.576 | 12 | 6 | 0.72 |
| 12 x 8 | 0.768 | 12 | 8 | 0.96 |
| 12 x 10 | 0.96 | 12 | 10 | 1.2 |
| 14 x 6 | 0.672 | 14 | 6 | 0.84 |
| 14 x 9 | 1.008 | 14 | 9 | 1.26 |
| 16 x 10 | 1.28 | 16 | 10 | 1.6 |
| 18 x 7 | 1.008 | 18 | 7 | 1.26 |
| 18 x 11 | 1.584 | 18 | 11 | 1.98 |
| 20 x 8 | 1.28 | 20 | 8 | 1.6 |
| 20 x 12 | 1.92 | 20 | 12 | 2.4 |
| 22 x 9 | 1.58 | 22 | 9 | 1.98 |
| 22 x 14 | 2.46 | 22 | 14 | 3.08 |
| 25 x 14 | 2.80 | 25 | 14 | 3.50 |
| 28 x 10 | 2.24 | 28 | 10 | 2.80 |
| 28 x 16 | 3.58 | 28 | 16 | 4.48 |
| 32 x 18 | 4.61 | 32 | 18 | 5.76 |
| 36 x 20 | 5.76 | 36 | 20 | 7.20 |
| 40 x 22 | 7.04 | 40 | 22 | 8.80 |
| 45 x 25 | 9.00 | 45 | 25 | 11.25 |